

Easy-to-use controls and information display screen simplifies operations

Predator SS Simplified Stretch

INFO



START



TURNTABLE SPEED



CARRIAGE SPEED

HIGHLIGHT

2694 PRAIRIE ST SW, GRAND RAPIDS, MI 49509
800-531-2465 www.highlightindustries.com

- **Info** displays machine operation and provides data for diagnostics
- **2 wrap modes** select spiral up and down, or spiral up only.
- **System reset** allows carriage and turntable to return to home position.
- **Turntable jog** allows manual jog operation of the turntable.
- **Carriage jog** allows for manual raising and lowering of the film carriage.
- **Top and bottom wraps** place one to ten additional wraps of film at the top or bottom of your load for extra stability.
- **Start** begins operation of the machine at the settings of all other controls.
- **Banding** Stops the film carriage anywhere in its travel to provide extra "banding" wraps to reinforce the load.
- **Turntable speed** adjusts the speed of the turntable for your particular load.
- **Carriage speed** allows you to adjust carriage speed for film overlap.
- **Stop** Halts all machine functions immediately. Pull STOP out and press START button to complete the wrapping cycle.
- **Power safety disconnect** must be ON to operate your Predator® SS.
- **Electrical cabinet** with two keyed locks for safety and security.

System Specifications*


Simplified Stretch	Adjustable 60% to 150%, typical
Turntable Speed	Adjustable to 12 RPM
Wrap Height	to 80 inches
Motors	Baldor 90 VDC
Electronics	State-of-the-art microcontroller with advanced diagnostics INFO screen
Load Weight Capacity	4,000 pounds
Electrical	115 Volts, 15 Amps
Wrap Modes	2 (Spiral Up/Down & Spiral Up Only)
Machine Weight	1,175 Pounds

Available in low or high profile and with optional ramp.
*Subject to change without notice.

Contact:

PREDATOR SS with SIMPLIFIED STRETCH

Low Profile with Optional Ramp

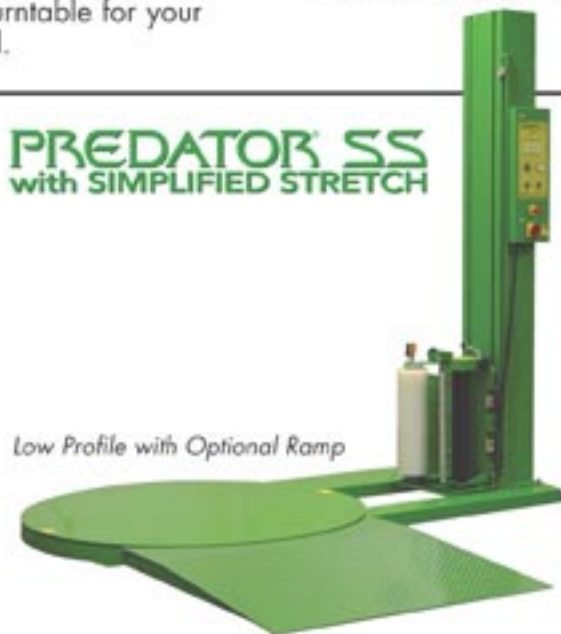

High Profile



HIGHLIGHT
INDUSTRIES, INC.

2694 Prairie SW, Grand Rapids, Michigan 49509
800-531-2465 ■ 616-531-2464 ■ Fax: 616-531-0506